


BS-K Series

FOR BACKSTOP APPLICATION

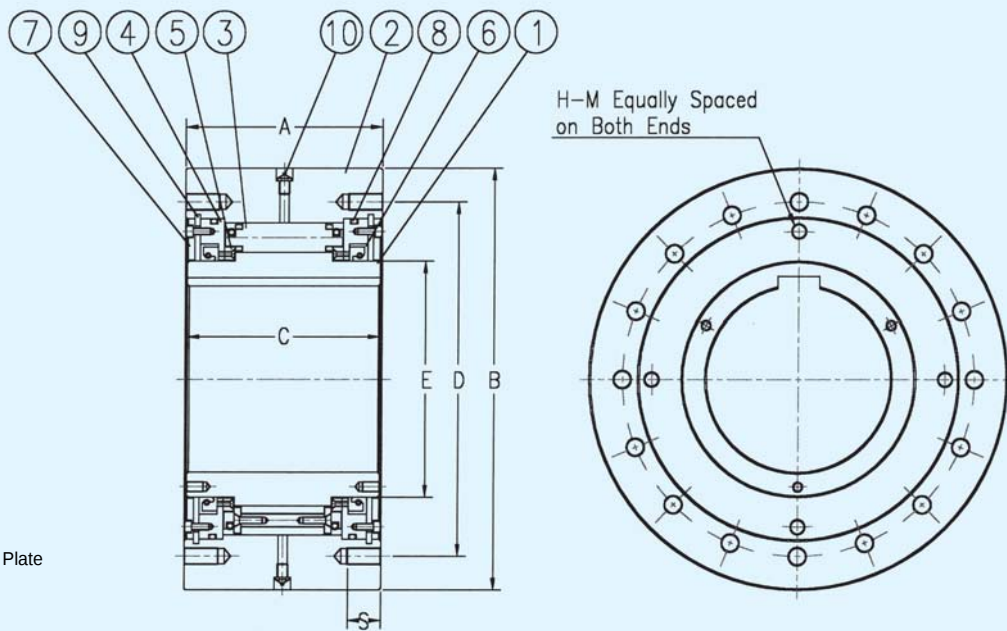

Specification

Dimensions-mm

Model	Max Torque (kgf-m)	Stock Bore Size	Normal Overrunning Drag (kgf-m)	Max. Overrunning (rpm) Inner Race	A	B	C	D	E	S	H-M No. of Tapped Holes x Dia x Pitch	Grease Filler Hole	Q'ty of Grease (gf)	Weight (kgf)
BS 160K	2,500	100~160	3.5	100	135	360	130	315	210	40	10 x M20 x 2.5	PT 1/4	300	85.6
BS 200K	3,800	110~200	4.5	100	150	430	145	380	260	40	8 x M22 x 2.5	PT 1/4	380	140.0
BS 220K	5,000	150~220	7.5	80	235	500	230	420	280	40	16 x M20 x 2.5	PT 1/4	1,100	263.5
BS 250K	9,000	180~250	9.5	50	295	600	290	530	340	50	16 x M24 x 3.0	PT 1/4	3,200	580.0
BS 270K	12,500	200~270	9.5	50	295	650	290	575	370	50	16 x M24 x 3.0	PT 1/4	3,600	620
BS 300K	18,000	230~300	11.0	50	295	780	290	690	470	60	16 x M30 x 3.5	PT 1/4	4,500	850
BS 350K	32,000	250~350	16.0	50	320	930	360	815	535	70	16 x M36 x 4.0	PT 1/4	5,200	1,605

Character

Grease lubrication and lubrication maintenance is necessary.

- ※ Refer to page 18 for lubrication & maintenance
- ※ Specify the Bore & key way dimension when ordering (Refer to page 38~39)